

# oraimo OTW-330 FreePods Lite True Wireless Earbuds User Guide

Home » oraimo » oraimo OTW-330 FreePods Lite True Wireless Earbuds User Guide 🖺



#### **Contents**


- 1 oraimo OTW-330 FreePods Lite True Wireless Earbuds
- **2 PACKAGE CONTENTS**
- 3 BASIC PRODUCT SPECIFICATIONS oraimo lab test
- **4 CUSTOMER SERVICE**
- **5 WARRANTY CERTIFICATE**
- 6 Documents / Resources
- **7 Related Posts**



oraimo OTW-330 FreePods Lite True Wireless Earbuds



## **PACKAGE CONTENTS**

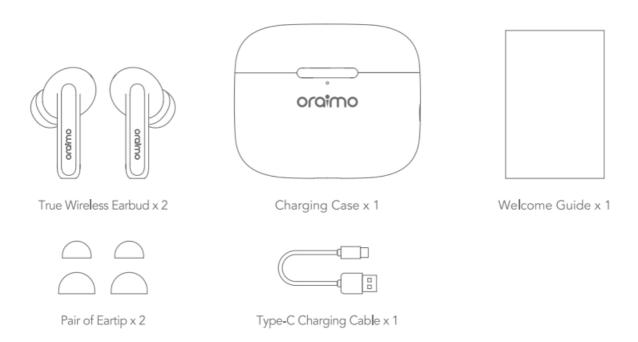

## **DOWNLOAD THE APP**





# iOS 9.0 or above




## Android 6.0 or above



Download APP: Please scan the QR code or search "oraimo Sound" in APP store or Google Play.


## **USING YOUR EARBUDS**

1.

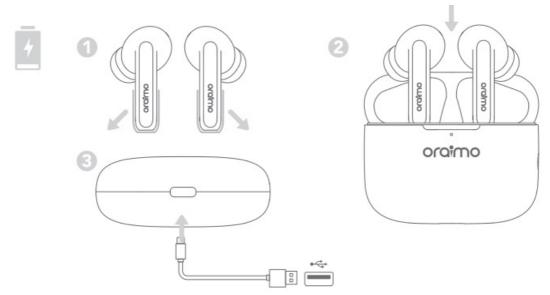


Remove the protective film.

- 2. Put the earbuds back to the charging case.
- 3. Fully charge the case for 2 hours.

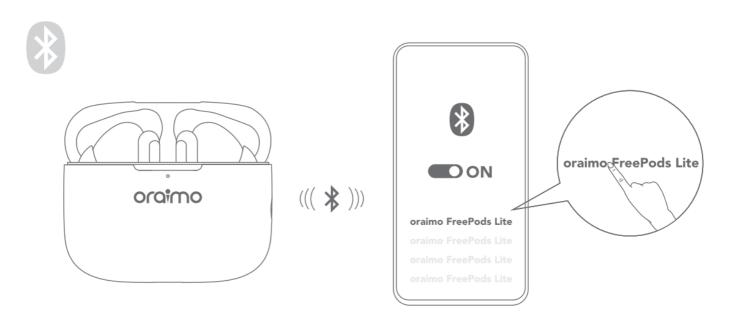


Earbuds will tum on and enter pairing mode automatically when open the lid of charging case for the first time use.

## **CONTROLS**

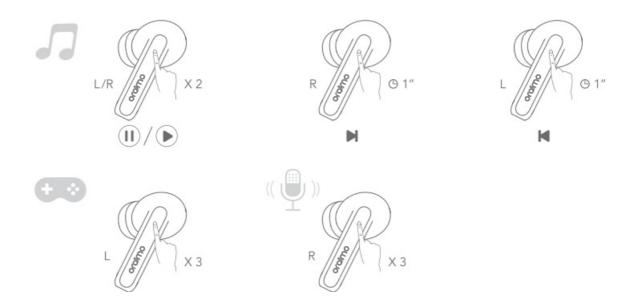

• Play/Pause: Tap twice, Next song: Long press right earbud for 1 second, Previous song: Long press left earbud for 1 second Low-latency Mode (Game Mode); Tap left earbud for three times, Active voice assistant Tap right earbud for three times

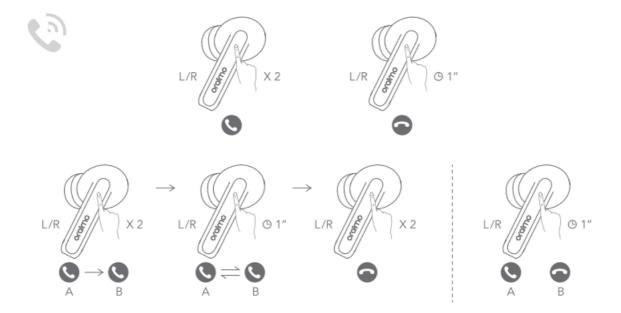

- 1. Answer/End a call: Tap twice;
- 2. Reject a call: Long press one earbud for 1 second;
- 3. Three-way calling, When there is a new call coming during the call communication
  - 1. tap one earbud twice to hold the current call A and answer the coming call B, Long press one earbud for 1 second to switch call between A and B, Tap one earbud twice to end the current call.
  - 2. Long press one earbud for 1 second to reject the coming call B.

## **FAQ**

Question 1	Reason	Solution
Earbuds don't turn off in the case.	Earbud charging contacts (pogo pin) may be dirty.	Use a cleaning cloth with alcohol to remove dirt from the pogo pin of earbuds.
Question 2	Reason	Solution
Only one earbud works.	There is no connection between the two earbuds.	1. Put both earbuds back into the case with the lid open. 2. Press the reset button on the case for 10 seconds until the indicator turns out. 3. Close the case for 10 seconds to complete the reset.
Question 3	Reason	Solution
Left and right earbuds don't have the same sound level.	Ear wax may block the sound tube.	Remove ear wax gently with a brush or other cleaning tool.

## **BASIC PRODUCT SPECIFICATIONS** • oraimo lab test results

BT version:	V5.3 (Only support BDR, EDR, BLE 1M)	
Range:	10m	
Music play time:	Up to 7-hr playtime on single charge; case provides additional 33-hr playtime.	
Battery capacity:	40mAh (each earbud)	
Charging time:	Approx. 1.5-hr	
Charging Case		
Battery capacity:	500mAh	
вашегу сарасну.		

1f the charging case is fully charged, it can recharge the earbuds about 4 times.

#### **ATTENTION**

- 1. Use original or certified cables
- 2. Do not expos to liquids
- 3. Do not disassemble
- 4. Avoid dropping
- 5. Avoid extreme temperatures
- 6. Do not use the product outdoors during a thunderstorm
- 7. Do not use any corrosive deaner/oil to dean
- 8. Use a cleaning doth with alcohol to remove dirt from 1he pogo pin of earbuds and charging case.

### **CONSIDERATE HINTS**

- 1. Do not turn up the volume to a fair high level constantly as this could shorten the service life of this product or impair your hearing.
- 2. When encounter any fault during operation, please wt off the power supply and disconnect the T ype-C cable to prevent further damage to 1he product or otlier components.
- 3. The wireless transmission range or connectivity could be affected by low battery power. In that case, please recharge immediately.

#### **CUSTOMER SERVICE**

#### **365 DAYS WARRANTY 8**

- Email: <a href="mailto:service@carlcare.com">service@carlcare.com</a>
- 1. All quality-related defects on items sold directly by oraimo or oraimo's authorized resellers are covered by an extensive warranty, starting from the date of purchase.
- 2. oraimo's limited warranty is restricted to the country of purchase. The limited warranty is void on items taken outside the country they were originally bought in or shipped to directly from an authorized online purchase.
- 3. This warranty covers only original oraimo products. It is not applicable to normal wear and tear, or any defects arising from damage caused by misuse of this product.

- 4. Warranty is for the primary product only nor transferable. Any free additional products) are not covered in this warranty.
- 5. If the product fails regardless of usage in compliance with the instruction manual and other written precaution, replacement will be provided free of charge.
- 6. To receive replacement, bring the warranty certificate and the product itself to the store from where you have purchased the product.

#### WARRANTY CERTIFICATE

Name:	
Address:	
Tel. No.:	
Date of purchase(dd/mm/yy):	
Store name:	
Warranty period:	

#### **True Wireless Earbuds**

Model: OTW-330

Hereby, ORAIMO TECHNOLOGY LIMITED. Declares that this True Wireless Earbuds is in compliance with the essential requirements and other relevant provisions of directive 2014/53/EU.

## **FCC Caution**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules.

## Operation is subject to the following two conditions

- 1. This device may not cause harmful interference, and
- 2. this device must accept any interference received, including interference that may cause undesired operation.

#### **IMPORTANT NOTE**

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### **FCC Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

- FCC ID:2AXYP-OTW-330-L
- FCC ID: 2AXYP-OTW-330-R

#### **CAUTION**

- 1. Risk of explosion if battery is replaced by an incorrect type, dispose of used batteries according to the instructions.
  - disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
  - leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
  - a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
- 2. EUT Temperature
  - 15 C ~ +55 C (Standalone).
  - Frequency Range(RF)
  - BT: 2402-2480MHz (TX/RX)
  - RF output power (only for CE)
  - BT Left: 6.71dBm Right:7.90dBm
  - BLE: Left:6.59dBm Right:7.80dBm

#### **EU DECLARATION OF CONFORMITY**

In accordance with EU Directives and Regulations

- Company name: ORAIMO TECHNOLOGY LIMITED
- Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG as the manufacturer hereby declares under our sole responsibility that the,
- Product(s): True Wireless Earbuds
- Model name: OTW-330 is in conformity with the essential requirements of the RE Directive 2014/53/EU
  - Radio Article 3.2 ETSI EN 300 328 V2.2.2 (2019-07)
  - EMC Article 3. 1(b) EN 301 489-1 V2.2.3(2019-11); Draft ETSI EN 301 489-17 V3.2.5 (2022-08)
  - Safety Article 3. 1(a) EN IEC 62368-1:2020+A11:2020
  - Health Article 3.1(a) EN 62479:2010&EN 50663:2017

An EU Type Examination Certificate for this Product was issued in accordance with Annex III (Module B) of the 2014/53/EU Radio Equipment Directive by Bay Area Compliance Laboratories Corp. (2014/53/EU Radio Equipment Directive Notified Body Identification Number 1313)

- (Signature of authorized person)
- Signature
- Greeny Xian Manager

• Date: 2023-3-22

## **Documents / Resources**



oraimo OTW-330 FreePods Lite True Wireless Earbuds [pdf] User Guide 2AXYP-OTW-330-R, 2AXYPOTW330R, OTW-330 FreePods Lite True Wireless Earbuds, FreePods Lite True Wireless Earbuds, True Wireless Earbuds, Wireless Earbuds, Earbuds

Manuals+,